



StarFive
赛昉科技

Using VisionFive 2 to Make An LED Blink at the PWM Frequency

with Python

Application Note

Version: 1.3

Date: 2025/08/06

Doc ID: VisionFive2-ANEN-005

Legal Statements

Important legal notice before reading this documentation.

PROPRIETARY NOTICE

Copyright©Shanghai StarFive Semiconductor Co., Ltd., 2025. All rights reserved.

Information in this document is provided "as is," with all faults. Contents may be periodically updated or revised due to the product development. Shanghai StarFive Semiconductor Co., Ltd. (hereinafter "StarFive") reserves the right to make changes without further notice to any products herein.

StarFive expressly disclaims all warranties, representations, and conditions of any kind, whether express or implied, including, but not limited to, the implied warranties or conditions of merchantability, fitness for a particular purpose and non-infringement.

StarFive does not assume any liability rising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation indirect, incidental, special, exemplary, or consequential damages.

All material appearing in this document is protected by copyright and is the property of StarFive. You may use this document or any part of the document for internal or educational purposes only, provided you do not modify, edit or take out of context the information in this document in any manner. Information contained in this document may be used, at your sole risk, for any purposes. StarFive authorizes you to copy this document, provided that you retain all copyright and other proprietary notices contained in the original materials on any copies of the materials and that you comply strictly with these terms. This copyright permission does not constitute an endorsement of the products or services.

Contact Us

Address: Room 506, Building 2, No. 61 Shengxia Rd., China (Shanghai) Pilot Free Trade Zone, Shanghai, 201203, China

Website: <http://www.starfivetech.com>

Email: sales@starfivetech.com(sales) , support@starfivetech.com(support)

Preface

About this guide and technical support information.

About this document

This application note provides steps to use VisionFive 2's GPIO pins to make an LED blink at the PWM frequency.

Revision History

Table 0-1 Revision History

Version	Released	Revision
1.2	2025/08/06	Updated the Linux and OS version in Environment Requirements (on page 8) . Updated the steps in Preparing Software (on page 10) . Updated the steps in Running Demo Code (on page 13) .
1.1	2023/06/08	- Added a note in 40-Pin GPIO Header Definition (on page 7). - Updated the method for installing VisionFive .gpio package in Preparing Software (on page 10). - Added Resources (on page 15) and Buy Now (on page 16) chapters.
1.0	2022/11/30	The first official release.

Notes and notices

The following notes and notices might appear in this guide:

-  **Tip:**
Suggests how to apply the information in a topic or step.
-  **Note:**
Explains a special case or expands on an important point.
-  **Important:**
Points out critical information concerning a topic or step.
-  **CAUTION:**
Indicates that an action or step can cause loss of data, security problems, or performance issues.
-  **Warning:**
Indicates that an action or step can result in physical harm or cause damage to hardware.

Contents

List of Tables.....	5
List of Figures.....	6
Legal Statements.....	2
Preface.....	3
1. Introduction.....	7
1.1. 40-Pin GPIO Header Definition.....	7
2. Preparation.....	8
2.1. Environment Requirements.....	8
2.2. Preparing Hardware.....	8
2.2.1. Hardware Setup.....	9
2.3. Preparing Software.....	10
3. Running Demo Code.....	13
4. Demo Source Code.....	14
5. Resources.....	15
6. Buy Now.....	16

List of Tables

Table 0-1 Revision History.....	3
Table 2-1 Hardware Preparation.....	8
Table 2-2 Connect LED to the 40-Pin Header.....	9



List of Figures

Figure 1-1 40-Pin GPIO Header Definition.....	7
Figure 2-1 Breadboard Overview.....	9
Figure 2-2 Connect LED to the 40-Pin Header.....	10




1. Introduction

This application note provides steps to use VisionFive 2's GPIO pins to make an LED blink at the PWM frequency.

1.1. 40-Pin GPIO Header Definition

The following figure shows the location of the 40-pin header on VisionFive 2.

Figure 1-1 40-Pin GPIO Header Definition

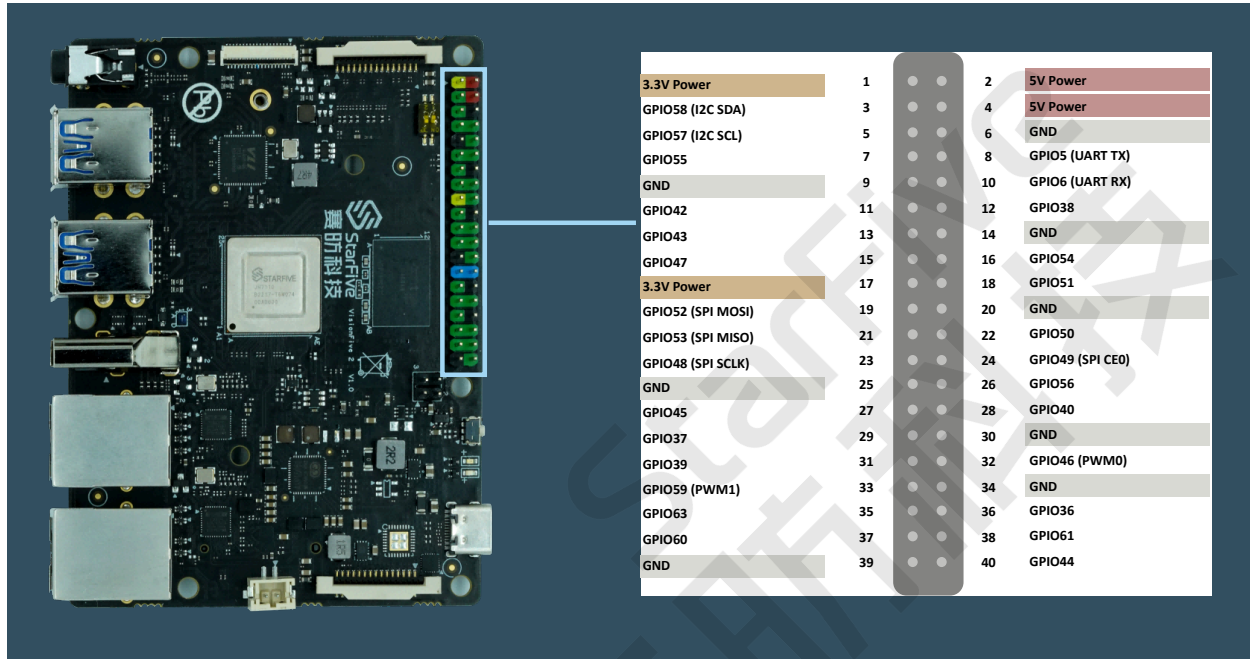

Note:

The multiplexed pin has been initialized and cannot be used as a general GPIO.

2. Preparation

Before executing the demo program, make sure you prepare the following:

2.1. Environment Requirements

The environment requirements are as follows:

- Linux Kernel: Linux 6.6
- OS: Debian 13
- SBC: VisionFive 2
- SoC: JH-7110

2.2. Preparing Hardware

Before executing the demo program, make sure you prepare the following:

Table 2-1 Hardware Preparation

Type	M/O*	Item	Notes
General	M	VisionFive 2 Board	-
General	M	• 32 GB (or more) micro-SD card • Micro-SD card reader • Computer (Windows/Mac OS/Linux) • USB to serial converter (3.3 V I/O) • Ethernet cable • Power adapter (5 V / 3 A) • USB Type-C Cable	These items are used for flashing Debian OS into a Micro-SD card.
GPIO Demo (LED)	M	• An LED • A Breadboard • Two Male-Female jumper wires • 470 Ω color ring resistor	• LED stands for Light Emitting Diode, and glows when electricity is passed through it. The longer leg (known as the 'anode'), is always connected to the positive supply of the circuit. The shorter leg (known as the 'cathode') is connected to the negative side of the power supply, known as 'ground'. • Breadboard: Refer to Breadboard Introduction (on page 9). • Resistor: Resistors are a way of limiting the amount of electricity going through a circuit; specifically, they limit the amount of 'current' that is allowed to flow.



Note:


*: M: Mandatory, O: Optional

Breadboard Introduction

The breadboard is a way of connecting electronic components to each other without having to solder them together. They are often used to test a circuit design before creating a Printed Circuit Board (PCB). As shown in the following figure, there are two lines at the top and the bottom respectively of the breadboard. These two lines are used for power connection: the blue line is for negative and the red line is for positive. Besides, they are divided into two sections, and the holes in each section are connected.

In each column (from A to E, and F to J), holes are connected electrically. In each row (from 1 to 57), holes are not connected.

Figure 2-1 Breadboard Overview

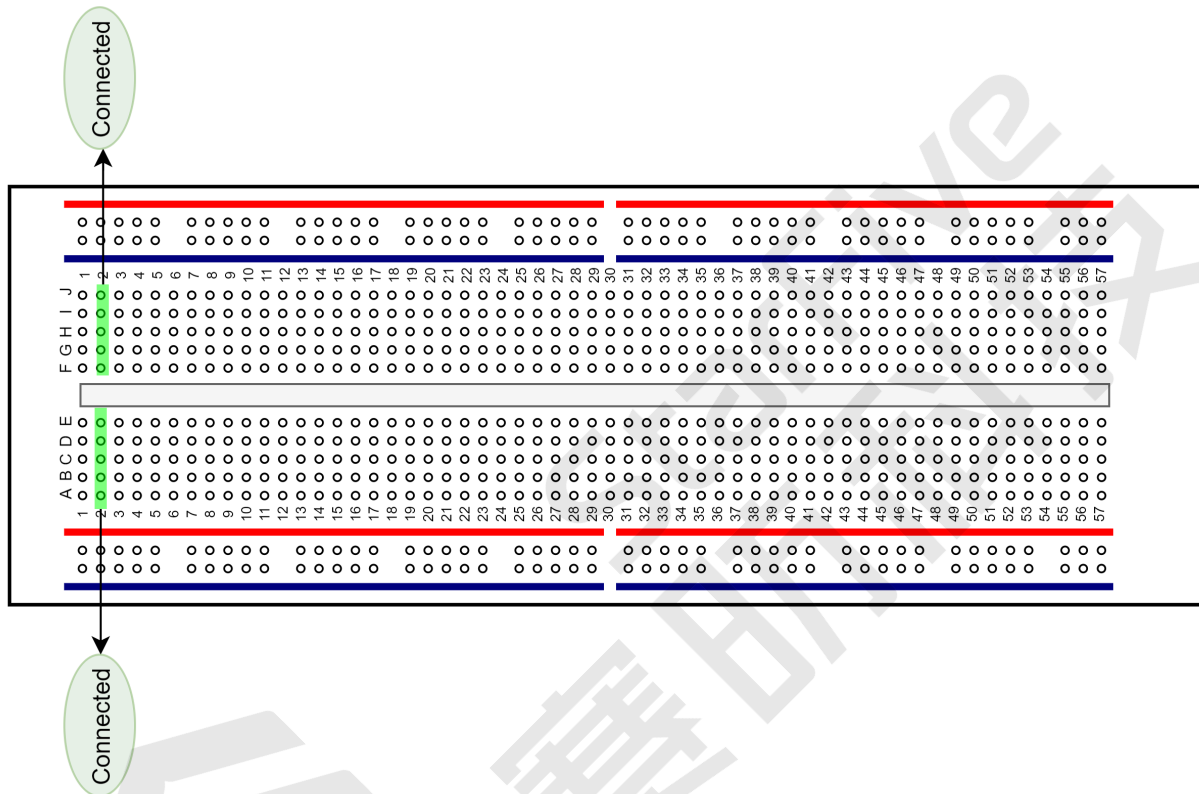

2.2.1. Hardware Setup

The following table and figure describe how to connect LED to the 40-pin GPIO header:


Table 2-2 Connect LED to the 40-Pin Header

LED	40-Pin GPIO Header	
	Pin Number	Pin Name
Positive	22	GPIO50
Negative	6	GND

Perform the following to connect the LED to the 40-pin GPIO Header:

1. Connect GPIO50 pin of VisionFive 2 to the red line of the breadboard.
2. Set up the resistor as shown in the following figure.
3. Connect the longer leg of the LED to the red line of the breadboard.
4. Connect the shorter leg of the LED to the blue line of the breadboard.
5. Connect the GND pin of VisionFive 2 to the blue line of the breadboard.

Figure 2-2 Connect LED to the 40-Pin Header

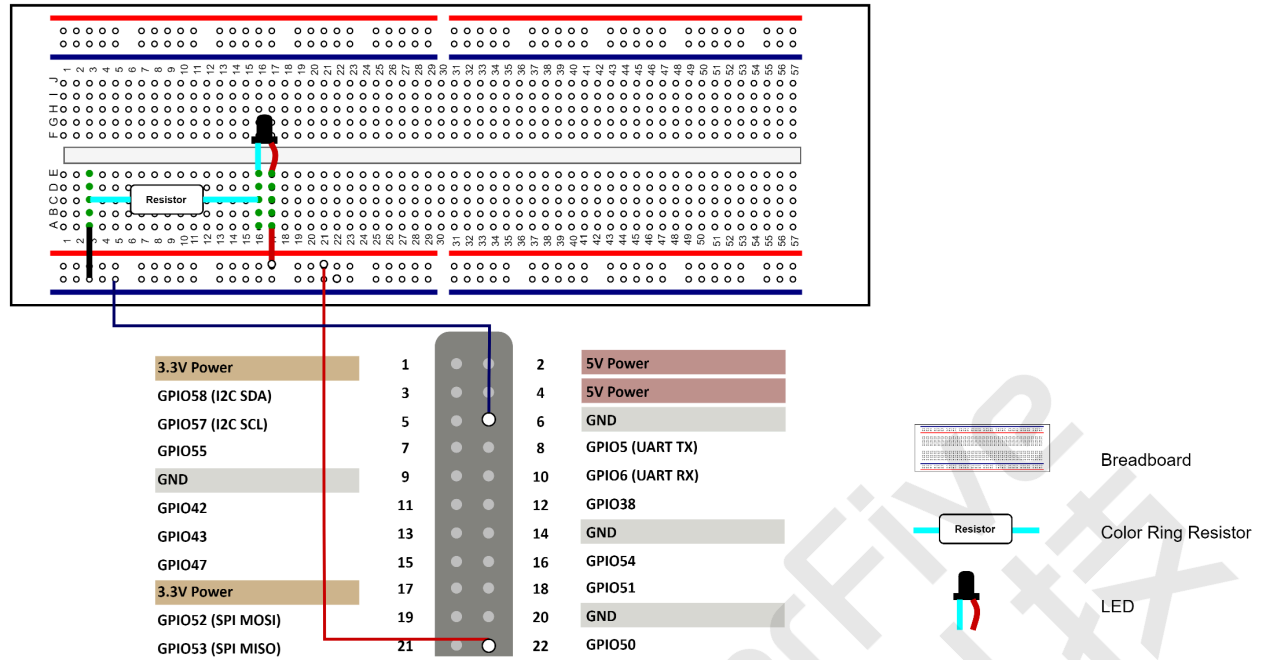

2.3. Preparing Software

Make sure the following procedures are performed:



Note:

The python project, `VisionFive . gpio`, is applicable for VisionFive, VisionFive 2 and JH-7110 EVB.

1. Flash Debian OS into a Micro-SD card as described in the *Flashing Fedora OS to a Micro-SD Card* section in the [VisionFive 2 Single Board Computer Quick Start Guide](#).
2. Log into the Debian and make sure VisionFive 2 is connected to the Internet. For detailed instructions, refer to the [Using SSH over Ethernet](#) or *Using a USB to Serial Converter* section in the [VisionFive 2 Single Board Computer Quick Start Guide](#).
3. Extend the partition on Debian as described in *Extend Partition* in the [VisionFive 2 Single Board Computer Quick Start Guide](#).
4. Execute the following command to install and create a Python3 Virtual Environment on Debian:

```
sudo apt install python3-venv
python3 -m venv myvenv
```



Note:

You may rename “myvenv” according to your preference.

5. Execute the `pip` command on VisionFive 2 Debian to install the `VisionFive . gpio` package:



Note:

Due to the fact that `pypi.org` official website does not yet support uploading `whl` installation packages for the RISC-V platform, so it cannot directly execute `python3 -m pip install VisionFive.gpio` command to install online.

Please follow the steps below to install the `VisionFive . gpio` package.



- a. Execute the following command to install dependent package within the newly created virtual environment:

```
sudo apt install libxml2-dev libxslt-dev
source ./myvenv/bin/activate
python3 -m pip install requests wget bs4
```

- b. Execute the following command to run the installation script `Install_VisionFive_gpio.py`:

```
python3 Install_VisionFive_gpio.py
```

The installation script codes are as follows:

```
import requests
import wget
import sys
import os
from bs4 import BeautifulSoup

def parse_data(link_addr, class_type, key_str):
    req = requests.get(url=link_addr)
    req.encoding = "utf-8"
    html = req.text
    soup = BeautifulSoup(req.text, features="html.parser")
    package_version = soup.find(class_type, class_=key_str)
    dd = package_version.text.strip()
    data = dd.split()
    return data

def parse_link(link_addr, class_type, key_str):
    version_list = []
    req = requests.get(url=link_addr)
    req.encoding = "utf-8"
    html = req.text
    soup = BeautifulSoup(req.text, features="html.parser")
    search_data = soup.find_all(class_type, class_=key_str)
    for i in range(0, len(search_data)):
        search_data[i] = search_data[i].find("a").get("href")
        version_list.append(search_data[i].split("cp")[-1].split("-")[0])

    python_version = sys.version
    python_version = python_version.split(".")[0] + python_version.split(".")[1]

    for i in range(0, len(search_data)):
        if python_version == version_list[i]:
            return search_data[i]

    return search_data[0]

def get_dl_addr_page():
    link_address = "https://pypi.org/project/VisionFive_gpio/#history"
    key_str = "release version"
    class_key = "p"
    data_get = parse_data(link_address, class_key, key_str)
    latest_version = data_get[0]
    dl_addr_page = "https://pypi.org/project/VisionFive_gpio/{}/#files".format(latest_version)
    return dl_addr_page

def get_dl_addr_of_latest_version(link_addr):
    key_str = "card file card"
    class_key = "div"
    addr_get = parse_link(link_addr, class_key, key_str)

    return addr_get

def main():
    dl_addr_p = get_dl_addr_page()
    whl_dl_addr = get_dl_addr_of_latest_version(dl_addr_p)

    whl_name = whl_dl_addr.split("/")[-1]
```



```
whl_name_suffix = os.path.splitext(whl_name)[-1]
whl_name_prefix = os.path.splitext(whl_name)[0]
whl_name_prefix_no_platform = whl_name_prefix[0: len(whl_name_prefix) - 3]
new_platform = "linux_riscv64"

rename_whl_name = "{}{}{}".format(whl_name_prefix_no_platform, new_platform,
whl_name_suffix)

wget.download(whl_dl_addr, out=rename_whl_name)

os.system("pip install " + rename_whl_name)
os.system("rm -rf " + rename_whl_name)

if __name__ == '__main__':
    sys.exit(main())
```

c. (Optional) Exit the Python3 Virtual Environment.

```
deactivate
```

3. Running Demo Code

To run the demo code, perform the following on VisionFive 2 Debian:

1. Locate to the directory where the test code, `pwm_led.py`, exists:

- a. Source into the Python3 Virtual Environment:

```
source ./myvenv/bin/activate
```

- b. Execute the following command to install dependency:

```
python3 -m pip install pillow
```

- c. Execute the following command to get the directory where `VisionFive.gpio` exists:

```
python3 -m pip show VisionFive.gpio
```

Result:

```
Location: /home/user/myvenv/lib/python3.11/site-packages
```



Note:

The actual output depends on how the application is installed.

- d. Execute the following to enter the directory, for example, `/home/user/myvenv/lib/python3.11/site-packages` as indicated in the previous step output:

```
cd /home/user/myvenv/lib/python3.11/site-packages
```

- e. Execute the following command to enter the `sample-code` directory:

```
cd ../VisionFive/sample-code/
```

2. Under the `sample-code` directory, execute the following command to execute the demo code:

```
sudo python pwm_led.py
```

Alternatively, you can execute the following command:

```
sudo python3 pwm_led.py
```

Result:

The LED blinks and the blink frequency will change according to the PWM frequency.

3. (Optional) Exit the Python3 Virtual Environment.

```
deactivate
```

4. Demo Source Code

The Python source code of this demo is provided for reference purposes only.

pwm_led.py:

```
'''
Please make sure the LED is connected to the correct pins.
The following table describes how to connect LED to the 40-pin header.
-----
LED          Pin Number  Pin Name
Positive      22         GPIO50
Negative       6          GND
-----
'''

import time
import VisionFive.gpio as GPIO

led_pin = 22

#Configure the direction of led_pin as out.
GPIO.setup(led_pin, GPIO.OUT)
#Configure the voltage level of led_pin as high.
GPIO.output(led_pin, GPIO.HIGH)

#Configure the frequency as 10.
p = GPIO.PWM(led_pin, 10)
#Initialize the duty ratio as 0.
p.start(0)

try:
    #Change the LED blink frequency.
    while True:
        for dc in range(0, 101, 5):
            #Change the duty ratio from 0 to 100. Step size: 5
            p.ChangeDutyRatio(dc)
            time.sleep(1)
        for dc in range(100, -1, -5):
            #Change the duty ratio from 100 to 0. Step size: -5
            p.ChangeDutyRatio(dc)
            time.sleep(1)
except KeyboardInterrupt:
    pass

p.stop()
GPIO.cleanup(led_pin)
```

5. Resources

Click on this tab to find all SBC relevant resources.

StarFive provides the following resources to guide you through an extraordinary experience on using the VisionFive 2 SBC.

- [RVspace Wiki](#)
- [Application Center](#)
- [Documentation Center](#)
- [Technical Forum](#)
- [VisionFive 2 GitHub Repository](#)
- [VisionFive 2 Debian OS Download](#)
- [Code download](#)
- [View All PDF Documents](#)

6. Buy Now

Click on this tab to find all the online shops and compatible accessories.

Buy SBC

Use the following page to find your nearest sales channel or the global channels for purchasing a VisionFive 2 Single Board Computer (SBC).

- [Buy VisionFive 2](#)

Buy Parts

Use the following page to find the parts that are tested as compatible with VisionFive 2.

- [Buy Accessory](#)